


LAMP SHADE INSTALLATION

1. Place one **BLACK RUBBER GASKET** on top of **CENTER WASHER** and one **GASKET** beneath the **CENTER WASHER**.
2. Press the **FINIAL** through both **GASKETS** and the **CENTER WASHER**.
3. Screw the **FINIAL** into the threaded hole in the top of the lamp head.

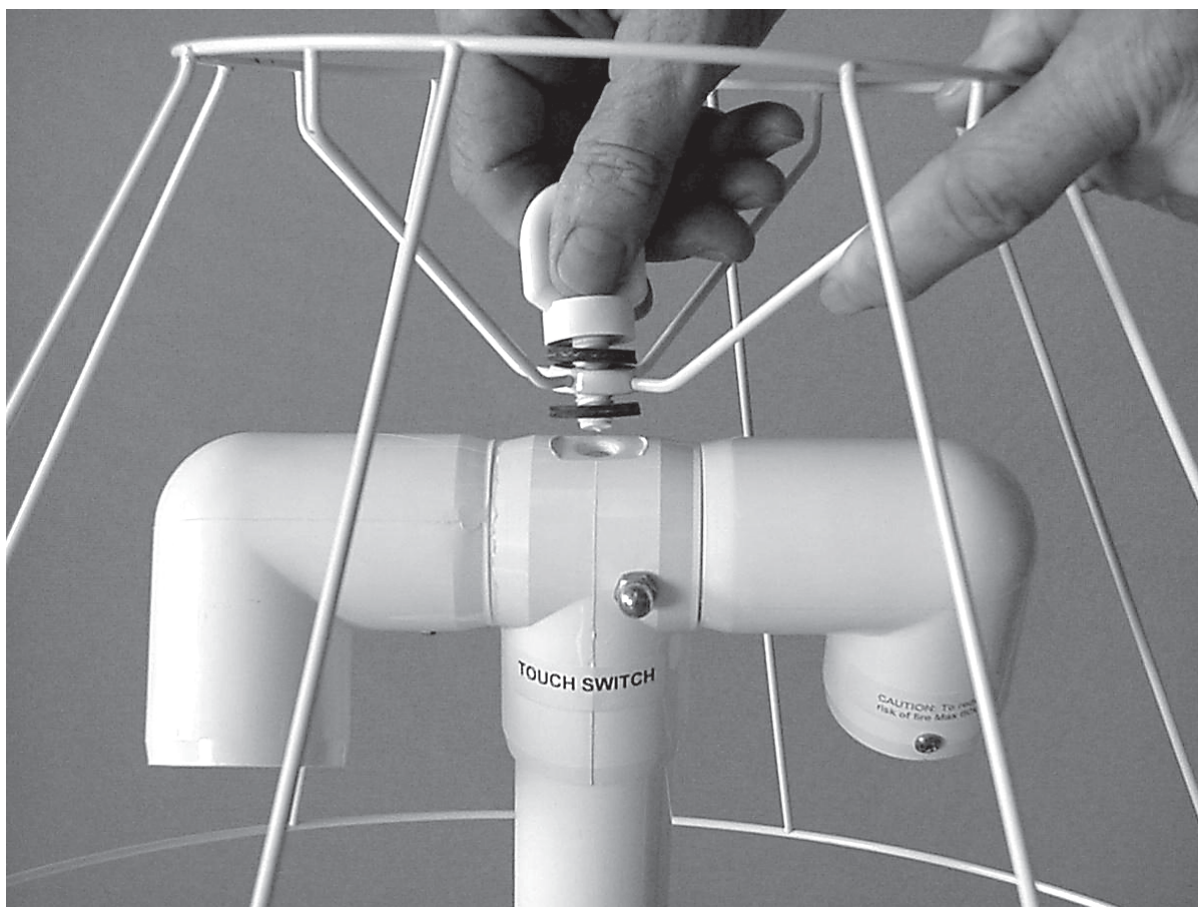

**Outdoor Lamp
Company Inc.**

12429 Denton Avenue
Hudson, FL 34667

MADE IN U.S.A.



Phone: 727-848-1134

Fax: 800-535-3411

**E-mail: info@outdoorlampcompany.com
Website: www.outdoorlampcompany.com**